

# TT-54'500

## Chiller

- with switchable heating
- with flow control
- water cooled version available
- optional without tank



Temperature range +50°F up to +104°F

Cooling capacity **15.4 Rt** nominal

Heating capacity **40'946 BTU/hr**

Pump capacity 66 gpm; max. 90 psi

Refrigerating agent R-134a

Ambient temperature up to +113°F



## Functions

- Self-optimizing temperature controller with temperature display 1/10°F – steps
- Display in °C or °F and l/min or gal/min
- Digital flow display and monitoring
- Integrated heating
- Automatic or manual refill

## Working principle

- The cooling compressor cools the content of the water tank to a required temperature
- The resulting warm exhaust air is blown upwards by a fan


## Construction

- Proven pump with mechanical seal
- Long life expectancy due to the electronic control of the compressors operating time
- All parts in contact with water are made of stainless steel or bronze
- Unit on castors


## Safety features

- Automatic level control with prewarning at low water level
- Electronic temperature limitation and monitoring in the controller
- Mechanical safety thermostats
- Visual and acoustic fault indications
- Integrated circuit breakers
- Main switch, transformer and motor protection switch

## Cooling capacity

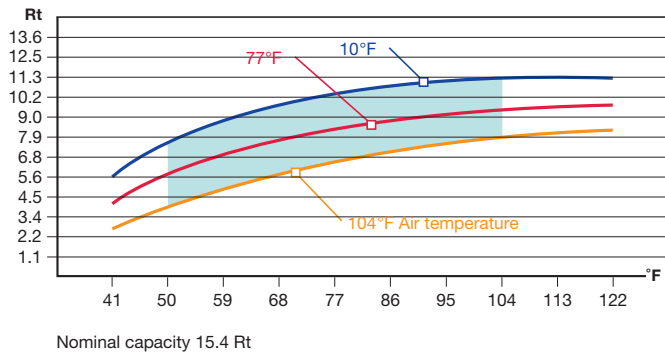

## Pump capacity

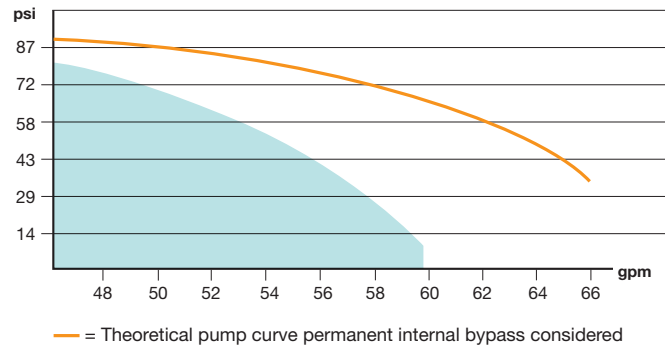

## Technical data

Product attributes	Unit	TT-54'500
Temperature control		Self-optimizing, electronic microprocessor controller MP-888 with digital display of the set and actual value. Automatic temperature monitoring.
Flow control		Electronically, with digital display and automatic control of the minimum flow.
Cooling capacity (Nominal capacity)	Rt	15.4 Rt - see diagram
Temperature range		
Circulating water	°F	+50°F up to +104°F
Air temperature	°F	+35.2°F up to +113°F
Heating	BTU/hr	40'946 BTU/hr, manual switchable
Content water tank	gal.	Approx. 66 gallons
Refrigerating agent		R-134a
Pump capacity		Max. 90 psi / max. 66 gpm - see pump diagram
Compressor		Hermetically sealed
Condenser		Air cooled, air inlet located on the side, blow out located on the top
Air volume		4'709 cfm (not relevant to WK)
Power consumption	kW	Approx. 18 kW (heating mode approx. 18 kW, cooling mode approx. 14 kW)
Connections		
To mould		1¼" NPT female thread
From mould		1½" NPT female thread
Automatic water refill		¾" NPT female thread
Drainage		1" NPT female thread
Cooling water (WK)		
Inlet		1" NPT female thread (only at water-cooled)
Outlet		1" NPT female thread (only at water-cooled)
Dimensions (L×W×H)	inch	53.1×41.3×76.8 inch, incl. castors
Noise level (in 9.8 feet distance)	dBA	65 dBA
Weight	lbs	1'290 lbs empty
Colour		Silvergrey RAL 7001

**TT-54'500 WK:** The same model is also available as a water cooled version:  
 Required cooling water: min. 21.7 psi water pressure  
 with cooling tower water (approx. 86°F) approx. 17.1 gpm cooling water consumption  
 with tap water (approx. 50 - 59°F) approx. 6.6 - 10.5 gpm cooling water consumption