


TT-188

Universal temperature control unit

Small device with high functionality

- with mould drainage
- with leakstopper
- with flow control

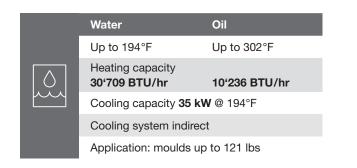



Functions

- Self-optimizing temperature controller with temperature display
 1/10 °F steps
- Display in °C or °F and I/min or gal/min
- Digital flow display and monitoring
- Automatic temperature control
- · Heating switchable in stages
- Pressure display
- Automatic or manual refill
- Automatic mould drainage
- Leakstopper device operation in pressure and vacuum mode possible

Construction


- Submersible sealless pump made from bronze
- · Limescale free heat exchanger
- Corrosion resistant unit for a long service life
- All parts in contact with water are made of stainless steel or bronze
- Unit on castors

Safety features


- Level control for dry run protection
- Electronic temperature limitation and monitoring in the controller
- Mechanical safety thermostats
- Visual and acoustic fault indications
- Integrated circuit breakers
- Main switch, transformer and motor protection switch



Cooling capacity

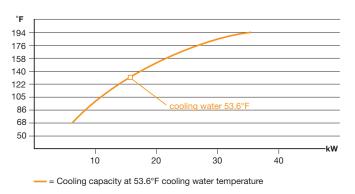

Pump capacity

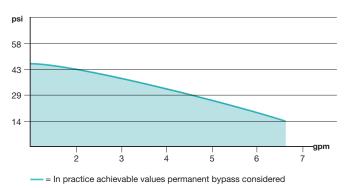

Technical Data

Product attribute	Unit	TT-188	
Medium		Water	Oil
Temperature range	°F	Up to 194°F	Up to 302°F
Temperature control		Self-optimizing, electronic microprocessor controller MP-888 with digital display of the set and actual value. Automatic temperature monitoring.	
Heating capacity	BTU/hr	30'709 BTU/hr	10'236 BTU/hr
Switchable in stages		3/6	None
Cooling capacity		35 kW at 194°F – see diagram	
Pump capacity			
Motor	HP	1 HP	
Pressure mode		Max. 58 psi / max. 16 gpm – see diagram	
Vacuum mode		Vacuum max. 23.17 inHg	
Filling amount		Min. 1.3 gallons, max. 1.8 gallons	
Connections			
Medium		½" NPT female thread	
Cooling water			
Inlet		With water filter %" NPT female thread	
Outlet		%" NPT female thread	
Dimension (L×W×H)	inch	26.4×10.2×25.6 inch, incl. castors	
Weight	lbs	Approx. 121 lbs empty	
Colour		Silvergrey RAL 7001	